Spectrum[™] 360° Adjustable Spray



An adjustable flow, full circle vortex sprayer with fine water droplets. Flow and coverage can be altered by rotating the cap.

Features

- Finger-tip flow control with shut-off option.
- Spike model to anchor Spectrum[™] at the plant.
- 4mm Barb model for direct attachment to micro or supply tubing.
- 10-32 Threaded model for installation into Rigid Risers and Asta® Stakes or Stakes.
- 1/2" Threaded model for riser pipe installations.

Applications


Pots, tubs, ground cover, landscaped gardens and nurseries. Waters large garden areas when used with Asta® Stakes and Risers.




Performance Chart - fully open (approx. 22 clicks)

Pressure (kPa)	360°		
	Flow (lph)	Diameter (m)	
100	64	2.8	
150	78	3.6	
200	90	4.0	

Flow Rate

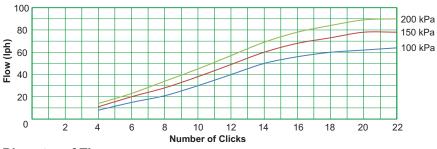

Diameter of Throw

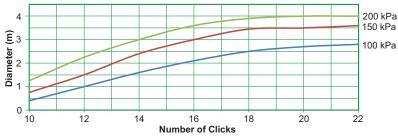







Spectrum[™] Thread 4 mm

Ordering Information - Spectrum[™] 360°

Base Type	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
Barb 4 mm	32045	50	100	11.8
Thread 4 mm	32015	50	100	13.8
Thread 1/2" FNPT	32025	25	65	9.1
Spike	32095	25	40	6.9



Spectrum[™] Thread 1/2" FNPT

Specifications

Dimensions Assembled		Barb	Thread	Thread 1/2"	Spike
HEIGHT		26 mm	26 mm	37 mm	137 mm
WIDTH		20 mm	20 mm	26 mm	42 mm
DEPTH		16 mm	16 mm	26 mm	16 mm
WEIGHT (approx.)		1.7 g	2.1 g	4.9 g	5.5 g
UV STABILISED MATERIAL	BASE	polypropylene	acetal	polypropylene	polypropylene
	CAP	polypropylene	polypropylene	polypropylene	polypropylene
	DEFLECTOR	acetal	acetal	acetal	acetal
BASE/CONNECTION TYPE: Inlet		BARB 4 mm	10-32 THREAD 4 mm	THREAD 1/2"FNPT	BARB 4 mm