


PVC-U Solvent welded BS fittings

PVC-U Raccordi per incollaggio BS

ELBOW 45°

GOMITO 45°

Rev. Oct 2020

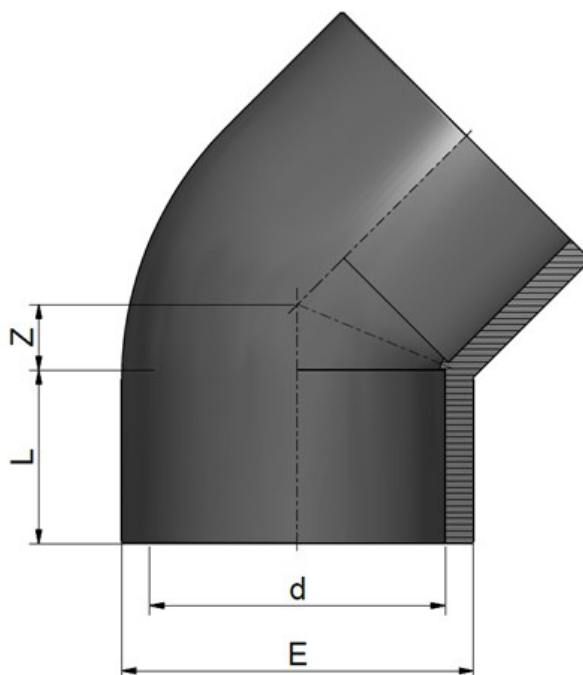

Code	d	L	Z	E	PN	Weight (g)
RARGYA0160	3/8"	15	5	23	15	10
RARGYA0200	1/2"	17	5	27	15	17
RARGYA0250	3/4"	20	6	33	15	25
RARGYA0320	1"	23	8	41	15	37
RARGYA0400	1"1/4	27	10	50	15	65
RARGYA0500	1"1/2	32	12	61	15	126
RARGYA0630	2"	38	15	75	15	225
RARGYA0750	2"1/2	44	19	89	15	302
RARGYA0900	3"	52	21	106	15	488
RARGYA1100	4"	63	25	133	15	838
RARGYA1400	5"	76	32	164	15	1650
RARGYA1600	6"	90	36	198	15	3096
RARGYA2250	8"	119	49	258	15*	6740

*Reduced safety factor / Fattore di sicurezza ridotto

Marks / Marchi: 1. BSI



NSF and WRAS certifications: only for valves with EPDM seals. Certifications and approvals are related to items declared on Official Listing or certificates. /
 Certificazioni NSF e WRAS: valide solo per le valvole con guarnizioni EPDM. Le certificazioni si riferiscono ai prodotti dichiarati nelle Official Listing o sui certificati stessi.