


# PVC-U Solvent welded BS fittings

## PVC-U Raccordi per incollaggio BS

### SOCKET MANICOTTO

Rev. Oct 2020

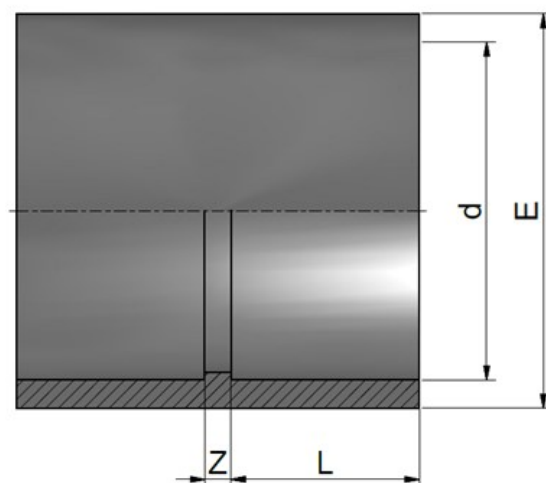

Code	d	L	Z	E	PN	Weight (g)
RARMAA0160	3/8"	15	3	23	15	9
RARMAA0200	1/2"	17	3	27	15	10
RARMAA0250	3/4"	20	3	33	15	20
RARMAA0320	1"	23	3	41	15	31
RARMAA0400	1"1/4	27	3	50	15	52
RARMAA0500	1"1/2	32	3	61	15	103
RARMAA0630	2"	38	3	76	15	175
RARMAA0750	2"1/2	44	3	90	15	222
RARMAA0900	3"	51	5	110	15	381
RARMAA1100	4"	63	6	133	15	695
RARMAA1400	5"	76	8	161	15	1083
RARMAA1600	6"	90	8	198	15	1685
RARMAA2250	8"	119	11	258	15*	4200

\*Reduced safety factor / *Fattore di sicurezza ridotto*

Marks / *Marchi*: 1. BSI



NSF and WRAS certifications: only for valves with EPDM seals. Certifications and approvals are related to items declared on Official Listing or certificates. /  
*Certificazioni NSF e WRAS: valide solo per le valvole con guarnizioni EPDM. Le certificazioni si riferiscono ai prodotti dichiarati nelle Official Listing o sui certificati stessi.*