



QF Dripline Header

THE INDUSTRY'S FIRST PRE-FABRICATED HEADER
QUICK. FLEXIBLE. EASY. RELIABLE.

The smart solution to this problem.



- **TIME AND EFFORT SAVINGS** – 3 times faster to install than traditional method
- **ADAPTABLE** – Flexible coil and rotating elbows are Ideal for any landscape design
- **ALWAYS READY** – Grab n' Go - Easy to manage and available with fittings
- **UNIVERSAL** – Works with Rain Bird XF Series Dripline and all other manufacturers
- **RELIABLE** – Robust and Durable, withstands harsh conditions

The QF Dripline Header is a patent-pending product that is the landscape industry's first pre-fabricated header for dripline installations. A Quick and Flexible replacement for a site-built header, the QF Dripline Header saves time and labor expense. Using a proprietary blend of polyethylene, similar to Rain Bird's XF Series Dripline, the QF Dripline header allows installers to simply roll out the header and attach the dripline at guaranteed 30 cm and 45 cm spacing. Eliminating the need for measuring, cutting, and taping, the QF Dripline Header saves time and money, making projects more profitable.

Fittings


The QF Dripline Header is designed to work with Rain Bird's new 25 mm compression fittings and adaptors* which provide an even tighter seal on tubing by using high quality barbs and twist locking fittings.



* 25 x 3/4" male union coupling, 25 x 1" male union coupling, 25 x 1" female union coupling, 25 mm quick tee coupling, 25 mm quick union coupling, 25 mm plug (x 2).

QF Header dripline calculator

		Dripline 33 cm 2,3 l/h	Dripline 40 cm 2,3 l/h	Dripline 50 cm 2,3 l/h	Dripline 33 cm 1,6 l/h	Dripline 40 cm 1,6 l/h	Dripline 50 cm 1,6 l/h
XQF7512100 XQF7518100	Max length (m)	264	320	400	380	460	575
	Max flow (l)	1840	1840	1840	1840	1840	1840

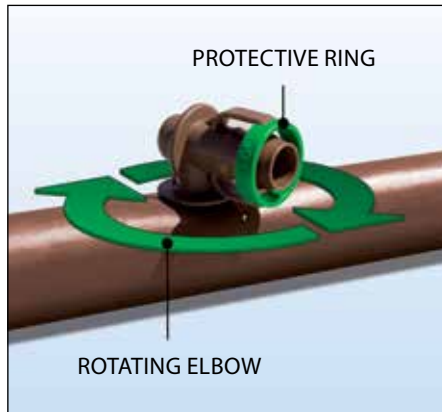

The QF Dripline Header elbows rotate 360° and incorporate a protective ring that surrounds the elbow – preventing damage and ensuring a proper seal. The ring also provides leverage to make attaching the dripline easier.

The rotating elbow also manages trenching misalignment. Move left or right to accommodate the dripline – no need to re-trench.

Models

XQF7512100: XQF 25 mm Dripline Header (30 cm spacing 30 m coil)

XQF7518100: XQF 25 mm Dripline Header (45 cm spacing 30 m coil)



Elbows utilize the same design as Rain Bird's popular XFF Fitting and requires 50% less insertion force than competitive elbows it also accommodates the XFF Fittings Tool.



Using the same reliable self-dispensing coil as other XF Series Dripline tubing, the QF Header lays straight when uncoiled and is easy to install around non-linear landscape features. It bends to a 38 cm radius without damage or kinking.

Rain Bird Europe SNC

Bat A - Parc Clamar
240, rue René Descartes - BP 40072
13792 Aix-en-Provence Cedex 3
FRANCE
Tel: (33) 4 42 24 44 61
Fax: (33) 4 42 24 24 72
rbe@rainbird.eu - www.rainbird.eu

Rain Bird Ibérica S.A.

C/ Valentín Beato, 22 2ª Izq. fdo
28037 Madrid
ESPAÑA
Tel: (34) 91 632 48 10
Fax: (34) 91 632 46 45
rbib@rainbird.eu - www.rainbird.es
Portugal@rainbird.eu - www.rainbird.eu

Rain Bird France SNC

BAT A - Parc Clamar
240, rue René Descartes BP 40072
13792 Aix-en-Provence Cedex 3
FRANCE
Tel: (33) 4 42 24 44 61
Fax: (33) 4 42 24 24 72
rbf@rainbird.eu - www.rainbird.fr

Rain Bird Turkey

Çamlık Mh. Dinç Sokak Sk. No.4 D:59-60
34760 Ümraniye, İstanbul
TÜRKİYE
Tel: (90) 216 443 75 23
Fax: (90) 216 461 74 52
rbt@rainbird.eu - www.rainbird.com.tr

Rain Bird Deutschland GmbH

Königstraße 10c
70173 Stuttgart
DEUTSCHLAND
Tel: +49 (0) 711 222 54 158
Fax: +49 (0) 711 222 54 200
rbd@rainbird.eu - www.rainbird.de

The Intelligent Use of Water™

www.rainbird.eu