




Non-Hydraulic Squeeze Off Tools

Operating Instructions

**Models: 125mm, 63mm, 63mm HD, 32mm
Poket Squeeze Tool, Mini Squeeze Tool**

Revision: 02



Helping you make the right connections.

© **Copyright Caldervale Technology Ltd.**

The copyright for this product and instruction manual is held by Caldervale Technology Ltd. Any technical specifications, or illustrations part of this manual cannot be reproduced, used illicitly or distributed in any form for competitive purposes.

Contents

01. Introduction	02
02. Safety Instructions	03
03. Operation	04
04. 125mm 'A' Frame Squeeze Tool Specifications	06
05. 125mm 'A' Frame Squeeze Tool Parts Diagram	07
06. 63mm Squeeze Tool Specifications	08
07. 63mm Squeeze Tool Parts Diagram	09
08. 63mm Super Heavy Duty Squeeze Tool Specifications	10
09. 63mm Super Heavy Duty Squeeze Tool Parts Diagram	11
10. 32mm Heavy Duty Squeeze Tool Specifications	12
11. 32mm Heavy Duty Squeeze Tool Parts Diagram	13
12. Pocket Squeeze Tool Specifications	14
13. Mini Squeeze Tool Specifications	15
14. Warranty Information	16
15. Certificate of Conformity	18
16. Service and Repair	19
17. Decommissioning and Disposal	20

01. Introduction

General Description

These tools have been designed to limit the flow in PE pipe from 16mm to 125mm (dependant on model) with a range of SDR squeeze plates for pipe work in accordance with Gas Industry Standards GIS/PL2-7 Part 7 Squeeze-off tools and equipment.

These products (Caldertech Manual Squeeze Tools) have been manufactured, inspected and tested in accordance with the ISO9001 quality control systems and procedures in place at Caldervale Technology Ltd, Dewsbury.

Some Units covered in this manual have rotating pre-sized limiting plates that are used to limit the squeeze gap and prevent over compression of the PE pipe.



Important!

This tool should be used in accordance with the pipe manufacturers' recommendations and in line with local codes of practice.

This manual outlines the operation of the squeeze off tooling and forms a part of the product to which it relates. It should be kept for the life of the product. Any amendments issued by Caldervale Technology Ltd should be incorporated in the text. The manual should be passed to any subsequent holder or user of this product.

Caldervale Technology Ltd has a policy of continuous improvement in product quality and design. Caldervale Technology Ltd therefore reserves the right to change the specification of its models at any time, without prior notice.

It is the responsibility of the operator to ensure that the PE pipe is suitable for squeeze off application if in doubt contact the PE pipe manufacturer for confirmation.

Before Using


It is important to ensure all component parts are present and in serviceable condition. In addition, the setting of the limit stop (buffer) plates should be checked before every operation to ensure they are correct for the pipe size and wall thickness rating. Wrongly set buffer plates may cause insufficient or excessive pipe compression leading to pipe-wall damage, leakage or injury.

02. Safety Instructions

1. Read and understand the whole manual before using any squeeze tool.
2. It is imperative that all possible precautions are made to avoid unexpected movement of the tool during use.
3. To avoid injury the bottom bars should be removed or locked in position with the jack extended for transportation.
4. Operatives should wear eye protection, gloves, safety headwear and footwear when using the equipment.
5. A single squeeze tool cannot be guaranteed to provide 100% closure, where this is required users are advised to consider using 2 squeeze tools.

03. Operation

Instructions for Use

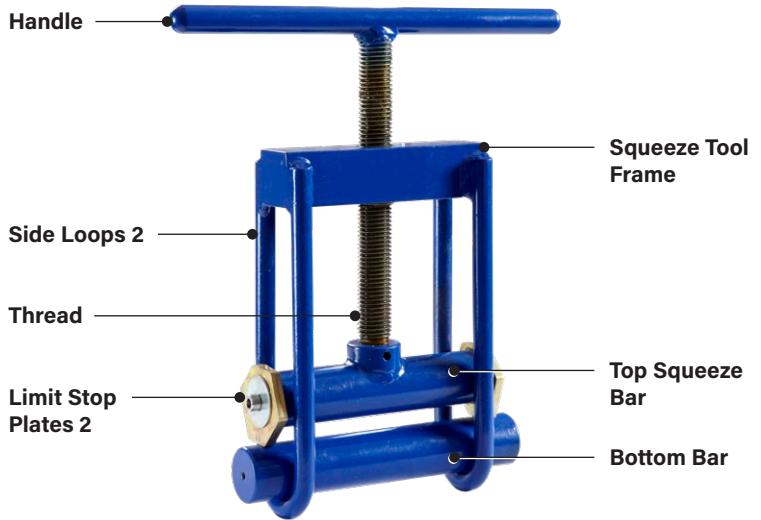

1. Remove the Bottom bar from the loops in the mainframe.
2. Set the limit stop plates (if present) to the correct pipe diameter and SDR rating of the pipe to be squeezed. If the plates do not have the correct sizes, check for another set, exchange if necessary. The plates are set correctly when the correct end face is pointing downwards and positioned to contact the bottom bar when this is re-fitted.
3. Position the frame over the pipe to be squeezed and slide the bottom bar into the loops of the mainframe beneath the pipe, position the pipe centrally between the squeeze bar and bottom bar. If the bottom bar has a spacer bar on it this must point downwards when the tool is upright.
4. Commence turning the handle clockwise to apply squeeze pressure.
5. Continue the turning action until the squeeze bar has fully closed the pipe, and the limit stop plates prevent further compression.

Removal After Squeeze Off

1. Unscrew the squeeze bar anticlockwise until the pipe is no longer in contact with the squeeze bars. This may require carrying out in controlled stages to prevent flow surges and excessive pressure drops in the pipework as the system fills up.
2. Allow the section of squeezed pipe to reform to its original shape, this may take several hours.
3. A selection of rerounding tools are available to help the pipe regain its original shape. These can be found at www.caldertech.com



Storage

Replace the BOTTOM BAR into the FRAME. Turn the handle fully clockwise until the LIMIT PLATES come into contact with the BOTTOM BAR.


1. Place inside the carrying bag if included with the tool.
2. Ensure the tool is clean and dry before storing.

Routine Maintenance


1. Grease screw thread at regular intervals.
2. The 125mm model is fitted with a grease nipple. It is recommended that this is used (where possible) at regular intervals to keep the screw thread properly lubricated.

04. 125mm 'A' Frame Squeeze Off Tool Specifications

Materials:	Mild Steel EN3A, Chrome Plated Tube
Finish:	Powder Coating / Zinc Plated (Steel)
Dimensions (HxWxD):	350mm x 420mm x 90mm
Weight:	9.2kg
Min Pipe Diameter	63mm
Max Pipe Diameter:	125mm
Product Codes:	02-31-801 (SDR11 and SDR17.6), 02-31-803 (SDR21), 02-31-804 (SDR 17.6), 02-31-805 (SDR11), 02-31-806 (SDR 11/17/26), 02-31-807 (SDR11 63/90/110 and SDR11 2"/3"/4" IPS)

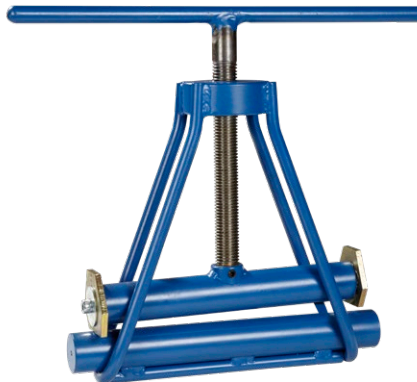

05. 125mm A Frame Squeeze Off Tool Parts Diagram

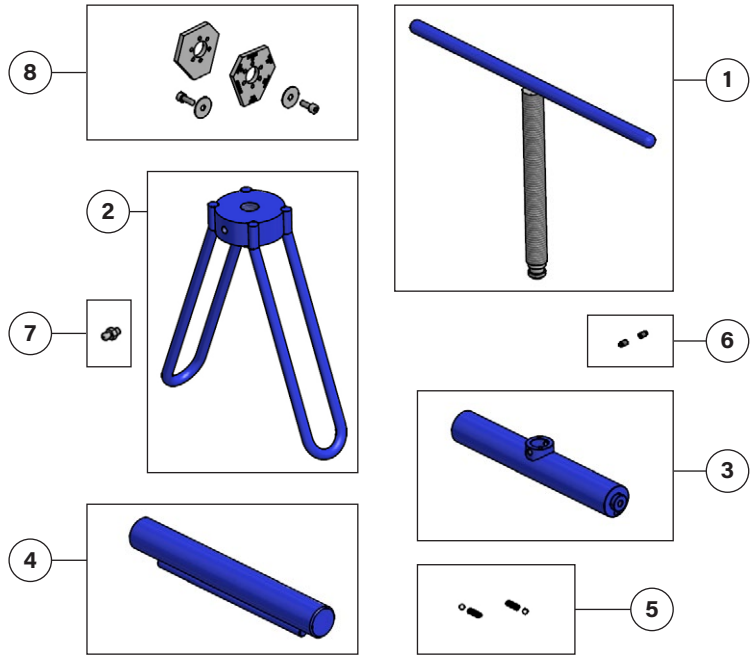


Part	Product Code	Description
1	02-31-843	Handle and thread
2	02-31-844	'A' Frame
3	02-31-845	Top Squeeze Bar
4	02-31-835	Bottom Squeeze Bar with Spacer Bar
5	02-31-838	Spring and Ball Bearing Kit
6	02-31-846	Squeeze Bar Grub Screws
7	02-31-847	Grease Nipple
8	02-31-842	Squeeze Plates SDR 21
	02-31-837	Squeeze Plates SDR 11 & 17.6
	02-31-840	Squeeze Plates SDR 17
	02-31-839	Squeeze Plates SDR 11

06. 63mm Squeeze Off Tool Specifications

Materials:	Mild Steel EN3A, Chrome Plated Tube
Finish:	Powder Coating / Zinc Plated (Steel)
Dimensions (HxWxD):	300mm x 300mm x 60mm
Weight:	4.8kg
Min Pipe Diameter	20mm
Max Pipe Diameter:	63mm
SDR:	11, 17, 17.6, 26
Product Code:	02-31-202



07. 63mm Squeeze Off Tool Parts Diagram

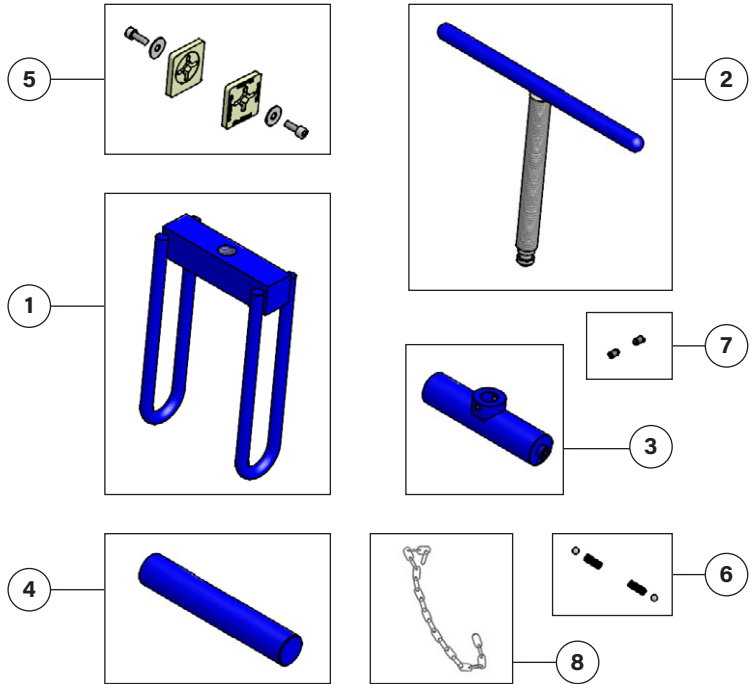


Part	Product Code	Description
1	02-31-250	Main Frame
2	02-31-251	Handle and Thread
3	02-31-252	Top Squeeze Bar
4	02-31-253	Bottom Squeeze Bar
5	02-31-270	Squeeze Plate Kit SDR11
6	02-31-271	Squeeze Plate Kit SDR17.6
7	02-31-272	Squeeze Plate Kit SDR17
	02-31-273	Squeeze Plate Kit SDR 26
8	02-31-673	Spring and Ball Bearing Kit
	02-31-254	Squeeze Bar Grub Screws
	02-31-257	Retaining Chain (Selected Models Only)

08. 63mm Super Heavy Duty Squeeze Off Tool Specifications

Materials:	Mild Steel EN3A, Chrome Plated Tube
Finish:	Powder Coating / Zinc Plated (Steel)
Dimensions (HxWxD):	300mm x 300mm x 60mm
Weight:	4.8kg
Min Pipe Diameter	20mm
Max Pipe Diameter:	63mm
SDR:	11, 17, 17.6, 26
Product Code:	02-31-401



09. 63mm Super Heavy Duty Squeeze Off Tool Parts Diagram

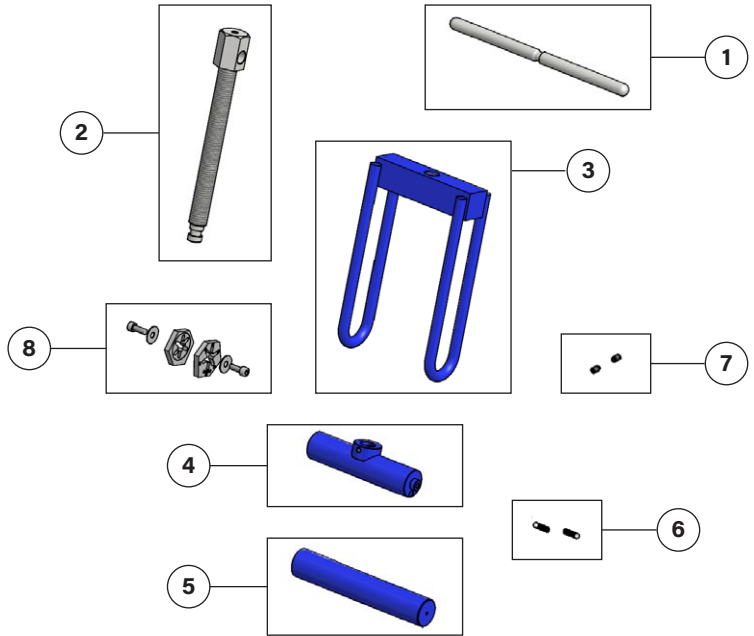


Part	Product Code	Description
1	02-31-258	Removable Handle
2	02-31-259	Thread with hex head
3	02-31-250	Main Frame
4	02-31-252	Top Squeeze Bar
5	02-31-253	Bottom Squeeze Bar
6	02-31-673	Spring and Ball Bearing Kit
7	02-31-254	Squeeze Bar Grub Screws
8	02-31-270	Squeeze Plate Kit SDR11
	02-31-271	Squeeze Plate Kit SDR17.6
	02-31-272	Squeeze Plate Kit SDR 17
	02-31-273	Squeeze Plate Kit SDR 26

10. 32mm Heavy Duty Squeeze Off Tool Specifications

Materials:	Mild Steel EN3A, Chrome Plated Tube
Finish:	Powder Coating / Zinc Plated (Steel)
Dimensions (HxWxD):	200mm x 130mm x 55mm
Weight:	3kg
Min Pipe Diameter	16mm
Max Pipe Diameter:	32mm
Product Code:	02-31-004



11. 32mm Heavy Duty Squeeze Off Tool Parts Diagram

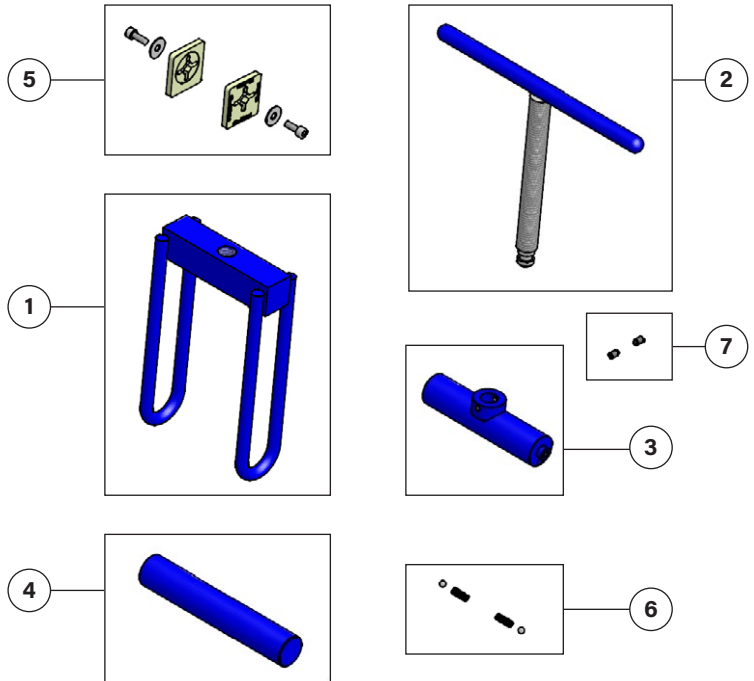


Part	Product Code	Description
1	02-31-030	Main Frame
2	02-31-031	Handle and Thread
3	02-31-032	Spare Top Squeeze Bar
4	02-31-033	Bottom Squeeze Bar
5	02-31-036	Squeeze Plate Kit SDR11
6	02-31-673	Spring and Ball Bearing Kit
7	02-31-034	Squeeze Bar Grub Screws

12. Pocket Squeeze Off Tool Specifications

Materials:	Mild Steel EN3A, Chrome Plated Tube Stainless Steel (02-31-011 only)
Finish:	Powder Coating / Zinc Plated (Steel)
Dimensions (HxWxD):	140mm x 85mm x 30mm
Weight:	<1Kg
Min Pipe Diameter	16mm
Max Pipe Diameter:	42mm
SDR:	All SDR Ratings
Product Codes:	02-31-001, 02-31-011 (Stainless Steel Model)

Note: This unit does not have limit stop plates included.

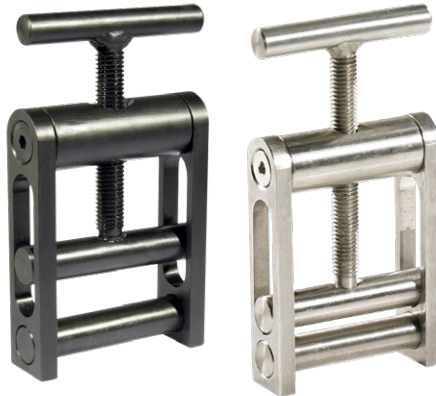

13. Mini Squeeze Off Tool Specifications

Materials:	Mild Steel EN3A, Chrome Plated Tube
Finish:	Powder Coating / Zinc Plated (Steel)
Dimensions (HxWxD):	170mm x 80mm x 30mm
Weight:	<1Kg
Min Pipe Diameter	16mm
Max Pipe Diameter:	32mm
SDR:	All SDR Ratings
Product Code:	02-31-002

Note: This unit does not have limit stop plates included.



14. Warranty Information

1. Extent of Warranty

- a) Subject to clauses 2 and 3, Caldervale Technology Ltd warrants to the end-user customer that its products will be free from defects in materials and workmanship, for six months after the date of purchase by the end-user customer, subject to providing proof of purchase.
- b) If Caldervale Technology Ltd receives, during the warranty period, notice of a defect in product which is covered by this warranty; Caldervale Technology Ltd shall either repair or replace the product, at its option. Any replacement product may be either new or like-new, provided that it has functionality at least equal to that of the product being replaced.
- c) All warranty work will be carried out by Caldervale Technology Ltd unless otherwise agreed. On-site warranty and repair or replacement services are available from authorised Caldervale Technology Ltd service facilities world-wide.
- d) Customers shall prepay shipping charges for products returned to Caldervale Technology Ltd for warranty service, and Caldervale Technology Ltd will charge for return of the products back to the customer.
- e) This warranty statement gives the customer specific legal rights. The customer may also have other rights which vary from country to country in the world.

2. Pre-conditions for Warranty Application

Caldervale Technology Ltd's warranty covers only those defects which arise as a result of normal use of the product, and this warranty shall only apply in the following circumstances:

- a) All the instructions contained in the operating manual have been complied with; and
- b) None of the following apply:
 - i) Improper or inadequate maintenance;
 - ii) Physical abuse;
 - iii) Unauthorised modification, misuse or any use not in accordance with the operating manual and good industry practice;

- iv) Operation outside the products specifications;
- v) Improper site preparation or maintenance;
- vi) Faulty pipes.

3. Limitations of Warranty

- a) Caldervale Technology Ltd does not warrant the operation of any product to be uninterrupted or error free.
- b) Caldervale Technology Ltd makes no other warranty of any kind, whether express or implied, with respect to its products. Caldervale Technology Ltd specifically disclaims the implied warranties of satisfactory quality and fitness for a particular purpose.
- c) To the extent that this warranty statement is inconsistent with the law of the locality where the customer uses the product, this warranty statement shall be deemed modified by the minimum necessary to be consistent with such local law.
- d) To the extent allowed by local law, the remedies provided in this warranty statement are the customer's sole and exclusive remedies.
- e) This tool has been designed for the range of pipes available at the time of its design and development. Caldervale Technology Ltd can accept NO liability for the unit's ability or otherwise to work with new or different pipes that subsequently appear in the market place.

Please complete this information and keep it safely with your proof of purchase receipt. You will require it for any warranty claim.

Where purchased: _____

Date of purchase: _____

Name of purchaser: _____

Address of purchaser: _____

Type of tool: _____

Serial number: _____

15. Certificate of Conformity



Certificate of Conformity

This document certifies that the product detailed below fully conforms to the following standard without derogation.

GIS/PL2-7:2013 Squeeze-off tools and equipment

**Caldertech Manual Squeeze Tools
125mm, 63mm, 63mm HD, 32mm HD, Pocket and Mini**

March 2019



I. Smith
Managing Director



Caldertech Technology Ltd
Breitfield Court, Dewsbury, West Yorkshire WF12 9BQ, UK
CRN 2769298 | ISO 9001:2015 Certified FM 30989

16. Service and Repair

These products has no specific calibration period, however periodic safety inspections should be carried out by the operator as specified in this manual, if in any doubt please contact the manufacturer for further information.

For service and repair please contact:

INTERNATIONAL

Caldervale Technology Ltd

Bretfield Court, Dewsbury,
West Yorkshire WF12 9BG, UK

T. +44 (0)1924 469571

E. sales@caldertech.com

W. caldertech.com

AUSTRALIA / NZ

Caldertech Australia Pty Ltd

Unit 3/30 Juna Drive,
Malaga WA 6090, Australia

T. +61 (0)8 9209 1132

E. sales@caldertech.com.au

W. caldertech.com.au

17. Decommissioning and Disposal

These give the instructions for decommissioning and disposal of the equipment and confirm how it is to be taken out of service safely, in respect of the Essential Environmental, Health and Safety Requirements.

- If a Caldertech Manual Squeeze tool has reached the end of its useful working life and cannot be refurbished it must be sent to a licensed recycling facility for treatment. That will ensure the waste hierarchy requirements are met.
- End of life treatment is the responsibility of the Customer. This can also be achieved by returning the product back to the manufacturer if required.

17. **Decommissioning and Disposal**

These give the instructions for decommissioning and disposal of the equipment and confirm how it is to be taken out of service safely, in respect of the Essential Environmental, Health and Safety Requirements.

- If a Caldertech Manual Squeeze tool has reached the end of its useful working life and cannot be refurbished it must be sent to a licensed recycling facility for treatment. That will ensure the waste hierarchy requirements are met.
- End of life treatment is the responsibility of the Customer. This can also be achieved by returning the product back to the manufacturer if required.

INTERNATIONAL

Caldervale Technology Ltd

Bretfield Court, Dewsbury,
West Yorkshire WF12 9BG, UK

T. +44 (0)1924 469571

E. sales@caldertech.com

W. caldertech.com

AUSTRALIA / NZ

Caldertech Australia Pty Ltd

Unit 3/30 Juna Drive,
Malaga WA 6090, Australia

T. +61 (0)8 9209 1132

E. sales@caldertech.com.au

W. caldertech.com.au



Caldertech
.com