


## DIWA 11

Company	Customer	Date	1/5/2021
Contact	Contact	List price	Price on req.
Project	Phone number	Family code	
Project no.	Email	Item no.	

Performance according to ISO 9906:2012 – Grade 3B

### Power data referred to:

Water, pure [100%] ; 4°C; 1000kg/m<sup>3</sup>; 1.57mm<sup>2</sup>/s

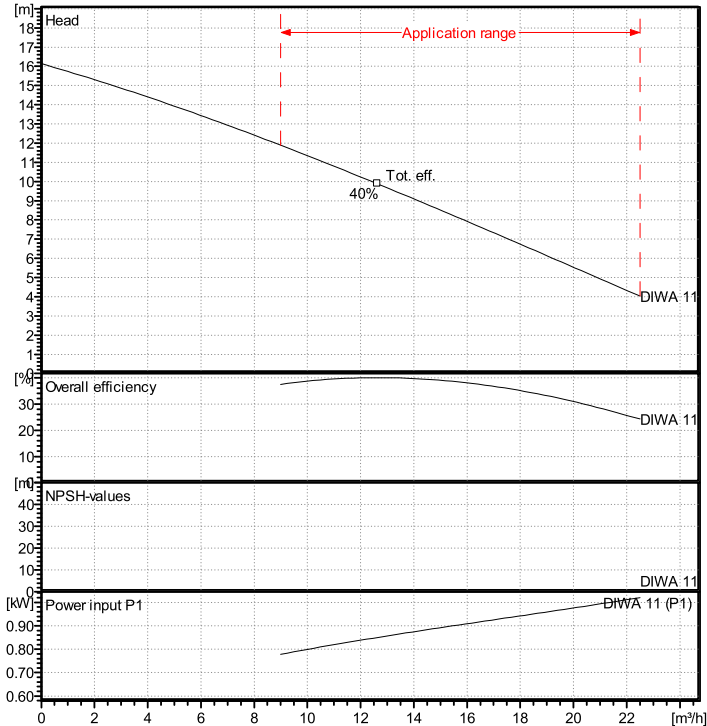

### Operating Data Specification

Flow	0 m <sup>3</sup> /h
Head	0 m

### Hydraulic data (duty point)

Flow	
Head	
Power input	

### Pump data

Make	Lowara
Type	DIWA 11 Submersible drainage pump
Speed	2900
Head H(Q=0)	16.1 m
Suction side	
Discharge side	
Types of installation	Submersible pump
Weight	17 kg

### Materials / seals

Pump body	Stainless steel
Impeller	Stainless steel
SUCTION FLANGE	Stainless steel/Thermoplastic
Diffuser	PA 66 + 30 % GF

### Shaft Seal

Rotating Assembly	Q1-Silicon carbide
Fixed Assembly	Q1-Silicon carbide
Elastomers	P-NBR
Springs	G-AISI 316
Other Components	G-AISI 316

### Motor data

Rated power P2	1.1 kW	Nom. Speed	2860 rpm
Frequency	50	Phase	1~
Rated voltage	230 V	Rated current	6.83 A
Protection class	IP X8	Insulation class	F
Permitted voltage tolerance +/- 10%			

### Dimensions mm

F	393		
H	375		

Note:

