

Customer	Date	1/6/2021
Contact	Project	
Phone number	Project no.	
Email		

5SV10F015T

1016LC871

Operating data

Pump type	Single head pump	Fluid	Water
No. of pumps / Reserve	1 / 0	Operating temperature t A	°C 4
Nominal flow	m ³ /h 0	pH-value at t A	7
Nominal head	m 0	Density at t A	kg/m ³ 1000
Static head	m 0	Kin. viscosity at t A	mm ² /s 1.569
Inlet pressure	kPa 0	Vapor pressure at t A	kPa 100
Environmental temperature	°C 20	Solids	0
Available system NPSH	m 0	Altitude	m 0

Pump data

Make	Lowara	Nominal	m ³ /h ()
Speed	rpm 2900	Flow Max-	m ³ /h 8.5
Number of stages	10	Min-	m ³ /h
Max. casing pressure	kPa	Nominal	m
Max. working pressure	kPa 740.2	Head at Qmax	m 32.5
Head H(Q=0)	m 75	at Qmin	m 75.5
Weight	kg 27	Shaft power	kW ()
	Max. mm 76	Max. shaft power	kW 1.4
Impeller R designed	mm 76	Efficiency	%
	Min. mm 76	NPSH 3%	m

Pump Materials

Pump body	Stainless steel / AISI 304
Impeller	Stainless steel / AISI 304
Diffuser	Stainless steel / AISI 304
Outer sleeve	Stainless steel / AISI 304
Shaft	Stainless steel / AISI 304
Adapter	Cast iron
Base	Aluminium
Coupling	Aluminium
SEAL HOUSING	Stainless steel / AISI 304
Coupling protection	Stainless steel / AISI 304
Shaft sleeve and bushing	Tungsten carbide
Fill / drain plugs	Stainless steel / AISI 304
Tie rods	Galvanized steel
Wear Ring	Technopolymer PPS

Shaft Seal

e-SV Mechanical seal	Roten
e-SV - Uniten (-30 / +120 °C)	
1 - Rotating part	Silicon Carbide
2 - Stationary part	Resin impregnated carbon
3 - Elastomers	EPDM
4 - Springs	AISI 316
5 - Other components	AISI 316

Motor data

Manufacturer	Lowara	Electric voltage	220 V	Speed	2895 rpm	Insulation class	155 (F)
Specific design	IE3 Three phase surface motor (e-SV)	Frame size	90R	Colour			RAL 5010
Type	SM90RB14/315 PE (220-240/380-415V)						
Rated power	1.5 kW	Degree of protection	IP55				
Electric current	5.56 A						

Remarks:


Customer	Date	1/6/2021
Contact	Project	
Phone number	Project no.	
Email		

5SV10F015T 1016LC871

Hydraulic data

Operating Data Specification		Hydraulic data (duty point)		Impeller design	
Flow	0 m ³ /h	Flow		Impeller R	76 mm
Head	0 m	Head		Frequency	50 Hz
Static head	0 m	MEI >=0,7		Speed	2900 rpm


Power datas referred to:
Water [100%] ; 4°C; 1000kg/m³; 1.57mm²/s
 Performance according to ISO 9906:2012 – Grade 3B

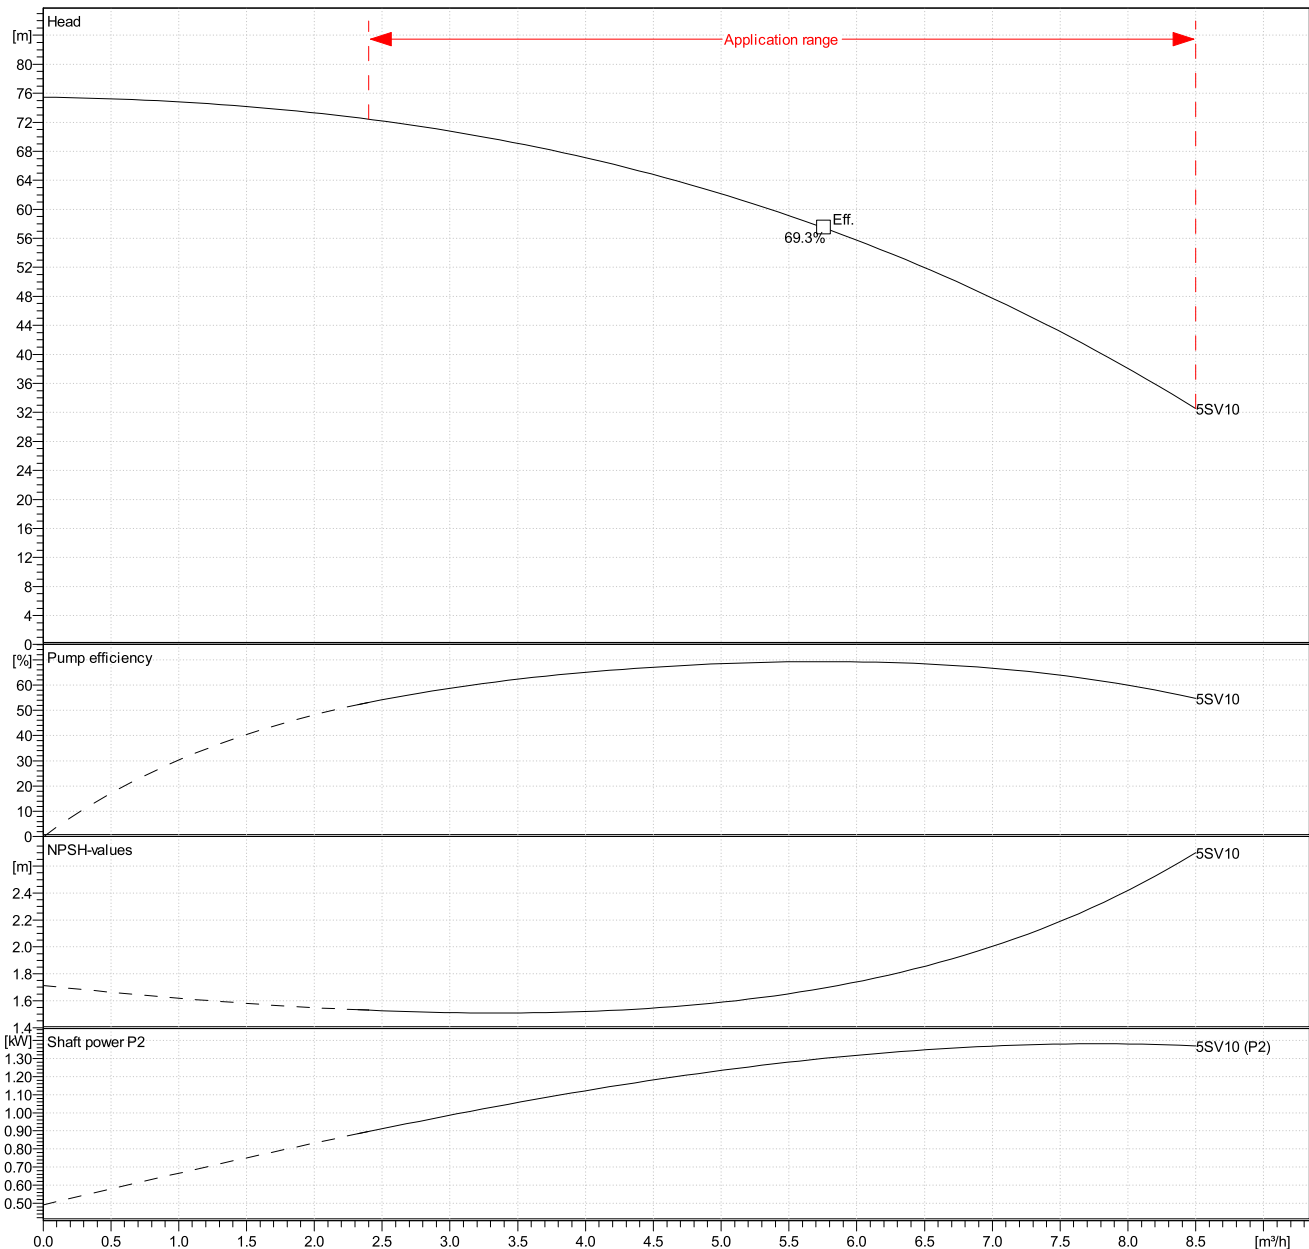

Customer	Date	1/6/2021
Contact	Project	
Phone number	Project no.	
Email		

5SV10F015T
1016LC871

Drawing

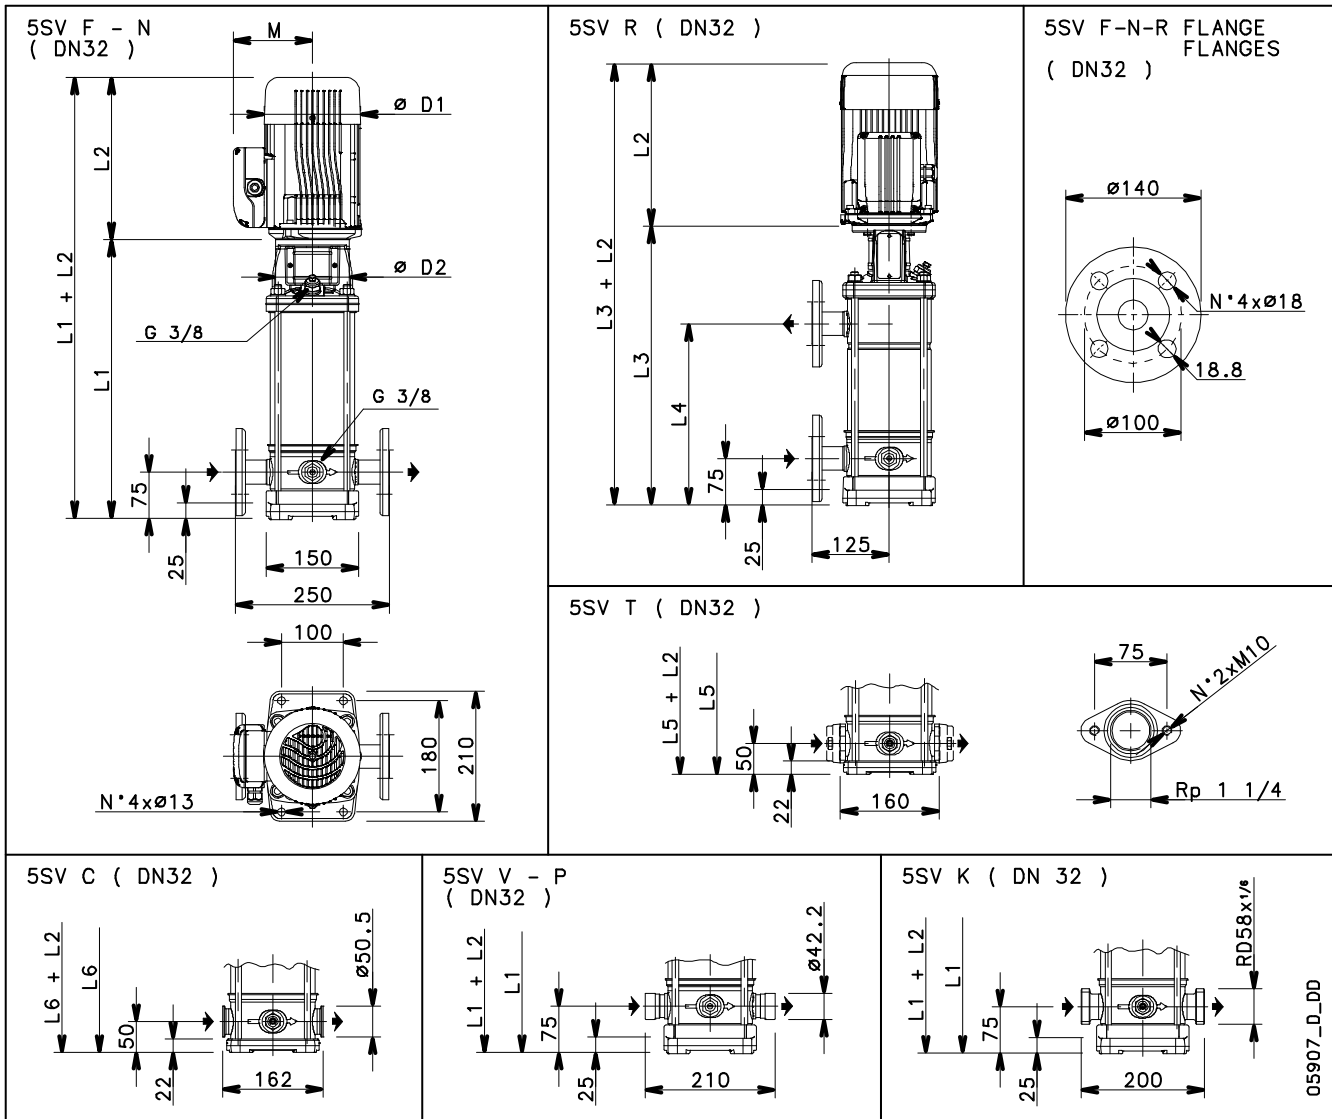

Dimensions mm

D1	155					Weight 26.5 kg
D2	140					
L1	488					
L2	263					
L3	488					
L4	317					
L5	463					
L6	463					
M	129					

05907_D_DD