

Customer	Date	1/6/2021
Contact	Project	
Phone number	Project no.	
Email		

## 1HM03P05M5HVBE

104600520

### Operating data

Pump type	Single head pump	Fluid	Water
No. of pumps / Reserve	1 / 0	Operating temperature t A	°C 4
Nominal flow	m <sup>3</sup> /h 0	pH-value at t A	7
Nominal head	m 0	Density at t A	kg/m <sup>3</sup> 1000
Static head	m 0	Kin. viscosity at t A	mm <sup>2</sup> /s 1.569
Inlet pressure	kPa 0	Vapor pressure at t A	kPa 100
Environmental temperature	°C 20	Solids	0
Available system NPSH	m 0	Altitude	m 0

### Pump data

Make	Lowara	Nominal	m <sup>3</sup> /h ( )
Speed	rpm 2900	Flow	Max- m <sup>3</sup> /h 2.4
Number of stages	3		Min- m <sup>3</sup> /h
Max. casing pressure	kPa	Nominal	m
Max. working pressure	kPa 329.8	Head	at Qmax m 15.9
Head H(Q=0)	m 34		at Qmin m 33.6
Weight	kg 7	Shaft power	kW ( )
	Max. mm 73	Max. shaft power	kW .3
Impeller R	designed mm 73	Efficiency	%
	Min. mm 73	NPSH 3%	m

### Pump Materials

Pump body	Stainless steel / AISI 304
Impeller	Technopolymer Noryl
Diffuser	Stainless steel / AISI 304
Shaft	Stainless steel / AISI 304
Adapter	Aluminium
SEAL HOUSING	Stainless steel / AISI 304
Fill / drain plugs	Nickel-plated brass
Wear Ring	Technopolymer
Bolts and screws	Stainless steel / AISI 304

### Shaft Seal

e-HM Mechanical seal	Roten
e-HM - Roten	
1 - Rotating part	Aluminium oxide (Ceramic)
2 - Stationary part	Carbon, resin-impregnated
3 - Elastomers	EPDM
4 - Springs	AISI 316
5 - Other components	AISI 316

### Motor data

Manufacturer	Lowara	Electric voltage	230 V	Speed	2705 rpm	Insulation class	155 (F)
Specific design	Single phase surface motor			Frame size	63	Colour	RAL 5010
Type	SM63HM../1055 [5H] = 220-240V						
Rated power	0.5 kW	Degree of protection	IP55				
Electric current	3.46 A						

### Remarks:

Customer	Date	1/6/2021
Contact	Project	
Phone number	Project no.	
Email		


## 1HM03P05M5HVBE

### 104600520

#### Hydraulic data

Operating Data Specification		Hydraulic data (duty point)		Impeller design	
Flow	0 m <sup>3</sup> /h	Flow		Impeller R	73 mm
Head	0 m	Head		Frequency	50 Hz
Static head	0 m			Speed	2900 rpm


Power data referred to:  
 Water [100%] ; 4°C; 1000kg/m<sup>3</sup>; 1.57mm<sup>2</sup>/s  
 Performance according to ISO 9906:2012 – Grade 3B

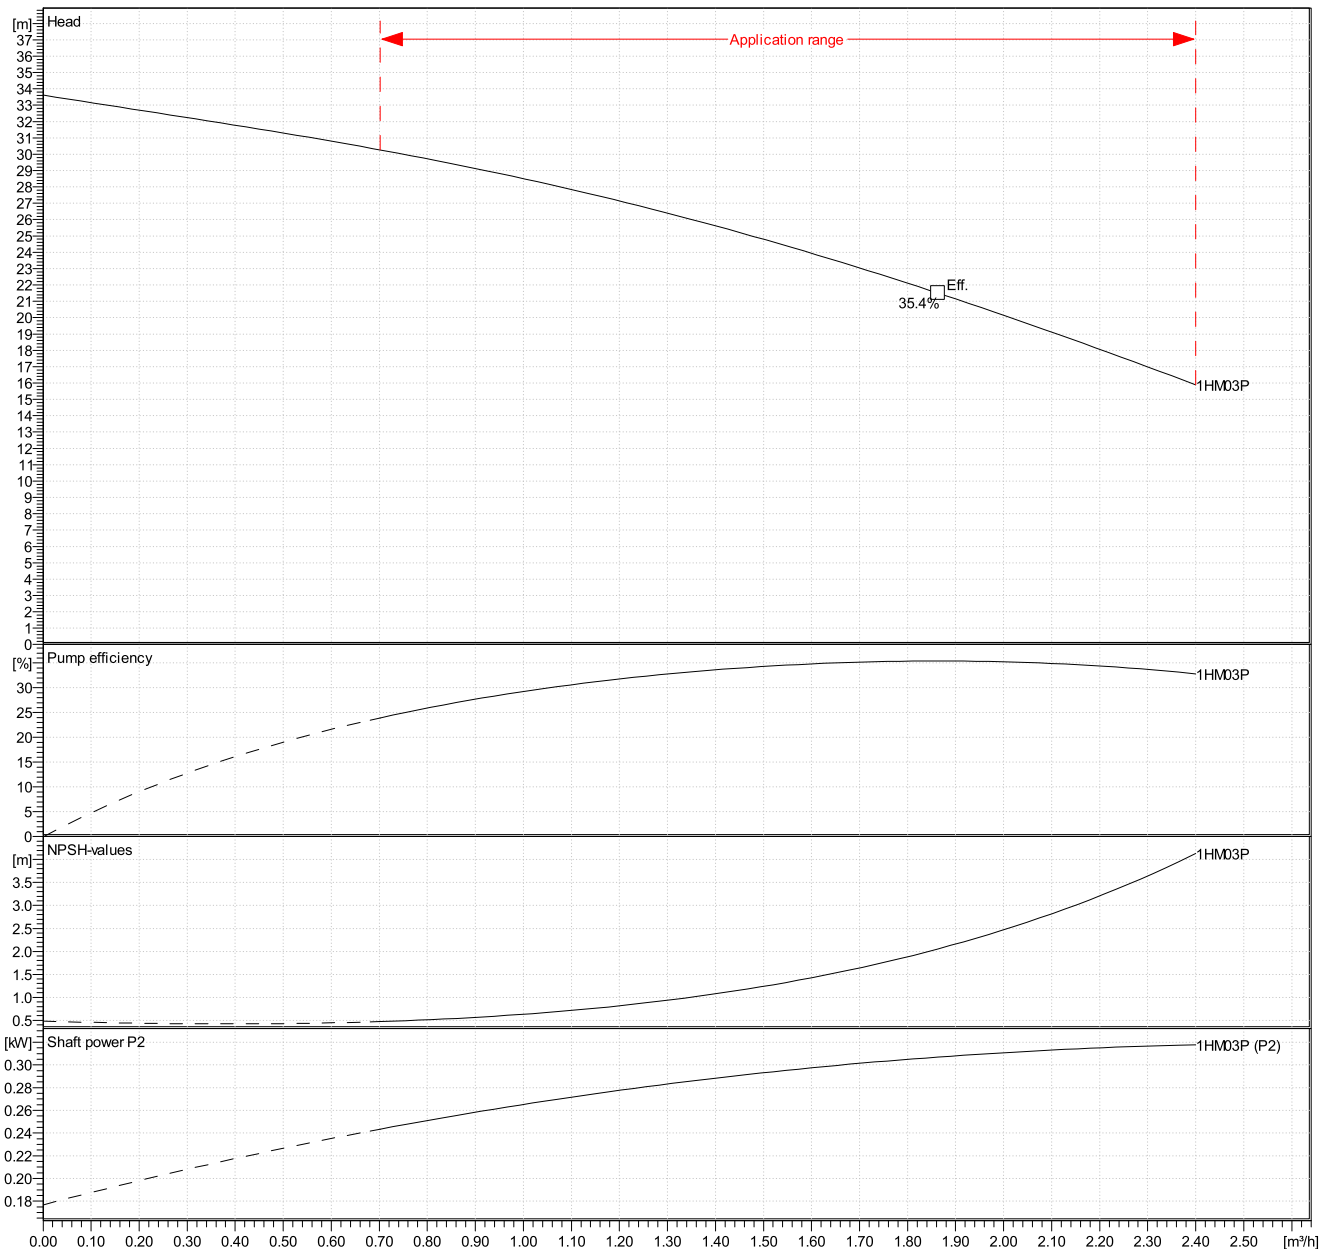

Customer	Date	1/6/2021
Contact	Project	
Phone number	Project no.	
Email		

**1HM03P05M5HVBE**  
104600520

**Drawing**

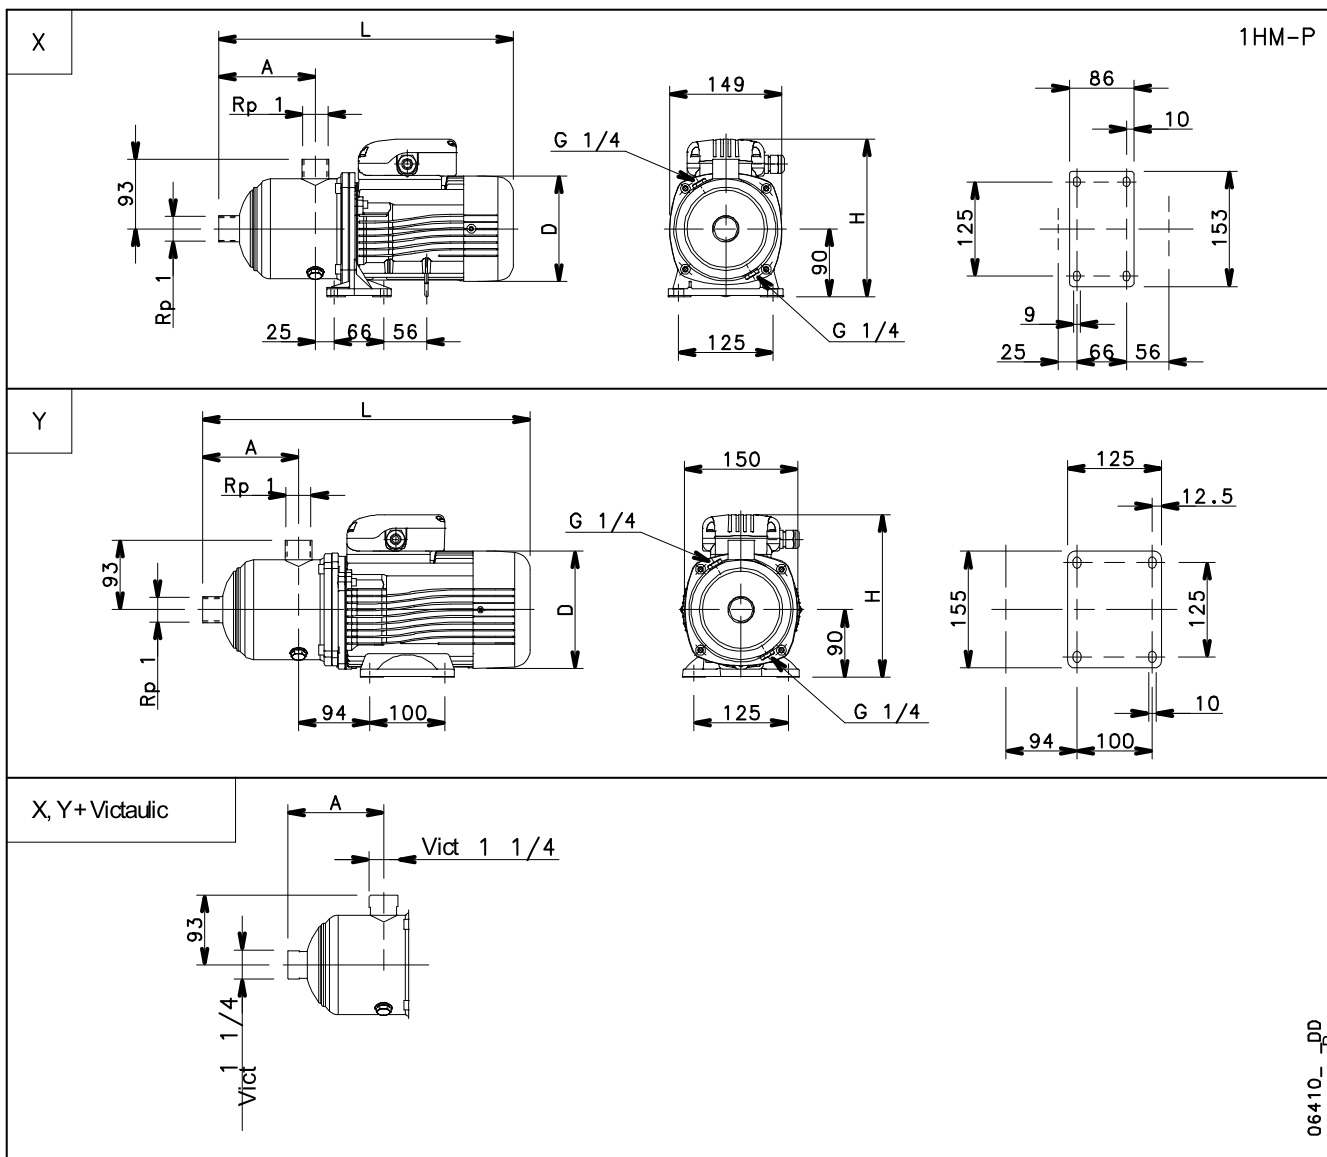

Dimensions mm

A	87					Weight 7 kg
D	120					
Drawing	X					
H	201					
L	336					
PN	10					