

Customer	Date	1/6/2021
Contact	Project	
Phone number	Project no.	
Email		

5HM06P11M5HVBE

104600790

Operating data

Pump type	Single head pump	Fluid	Water
No. of pumps / Reserve	1 / 0	Operating temperature t A	°C 4
Nominal flow	m ³ /h 0	pH-value at t A	7
Nominal head	m 0	Density at t A	kg/m ³ 1000
Static head	m 0	Kin. viscosity at t A	mm ² /s 1.569
Inlet pressure	kPa 0	Vapor pressure at t A	kPa 100
Environmental temperature	°C 20	Solids	0
Available system NPSH	m 0	Altitude	m 0

Pump data

Make	Lowara	Nominal	m ³ /h ()
Speed	rpm 2900	Flow Max-	m ³ /h 7.2
Number of stages	6	Min-	m ³ /h
Max. casing pressure	kPa	Nominal	m
Max. working pressure	kPa 706.1	Head at Qmax	m 20.8
Head H(Q=0)	m 72	at Qmin	m 72
Weight	kg 14	Shaft power	kW ()
	Max. mm 73	Max. shaft power	kW 1.1
Impeller R designed	mm 73	Efficiency	%
	Min. mm 73	NPSH 3%	m

Pump Materials

Pump body	Stainless steel / AISI 304
Impeller	Technopolymer Noryl
Diffuser	Stainless steel / AISI 304
Shaft	Stainless steel / AISI 304
Adapter	Aluminium
SEAL HOUSING	Stainless steel / AISI 304
Fill / drain plugs	Nickel-plated brass
Wear Ring	Technopolymer
Bolts and screws	Stainless steel / AISI 304

Shaft Seal

e-HM Mechanical seal	Roten
e-HM - Roten	
1 - Rotating part	Aluminium oxide (Ceramic)
2 - Stationary part	Carbon, resin-impregnated
3 - Elastomers	EPDM
4 - Springs	AISI 316
5 - Other components	AISI 316

Motor data

Manufacturer	Lowara	Electric voltage	230 V	Speed	2800 rpm	Insulation class	155 (F)
Specific design	Single phase surface motor			Frame size	80	Colour	RAL 5010
Type	SM80HM../1115 [5H] = 220-240V						
Rated power	1.1 kW	Degree of protection	IP55				
Electric current	6.88 A						

Remarks:

Customer	Date	1/6/2021
Contact	Project	
Phone number	Project no.	
Email		

5HM06P11M5HVBE

104600790


Hydraulic data

Operating Data Specification		Hydraulic data (duty point)		Impeller design	
Flow	0 m ³ /h	Flow		Impeller R	73 mm
Head	0 m	Head		Frequency	50 Hz
Static head	0 m			Speed	2900 rpm

Power data referred to:

Water [100%] ; 4°C; 1000kg/m³; 1.57mm²/s


Performance according to ISO 9906:2012 – Grade 3B

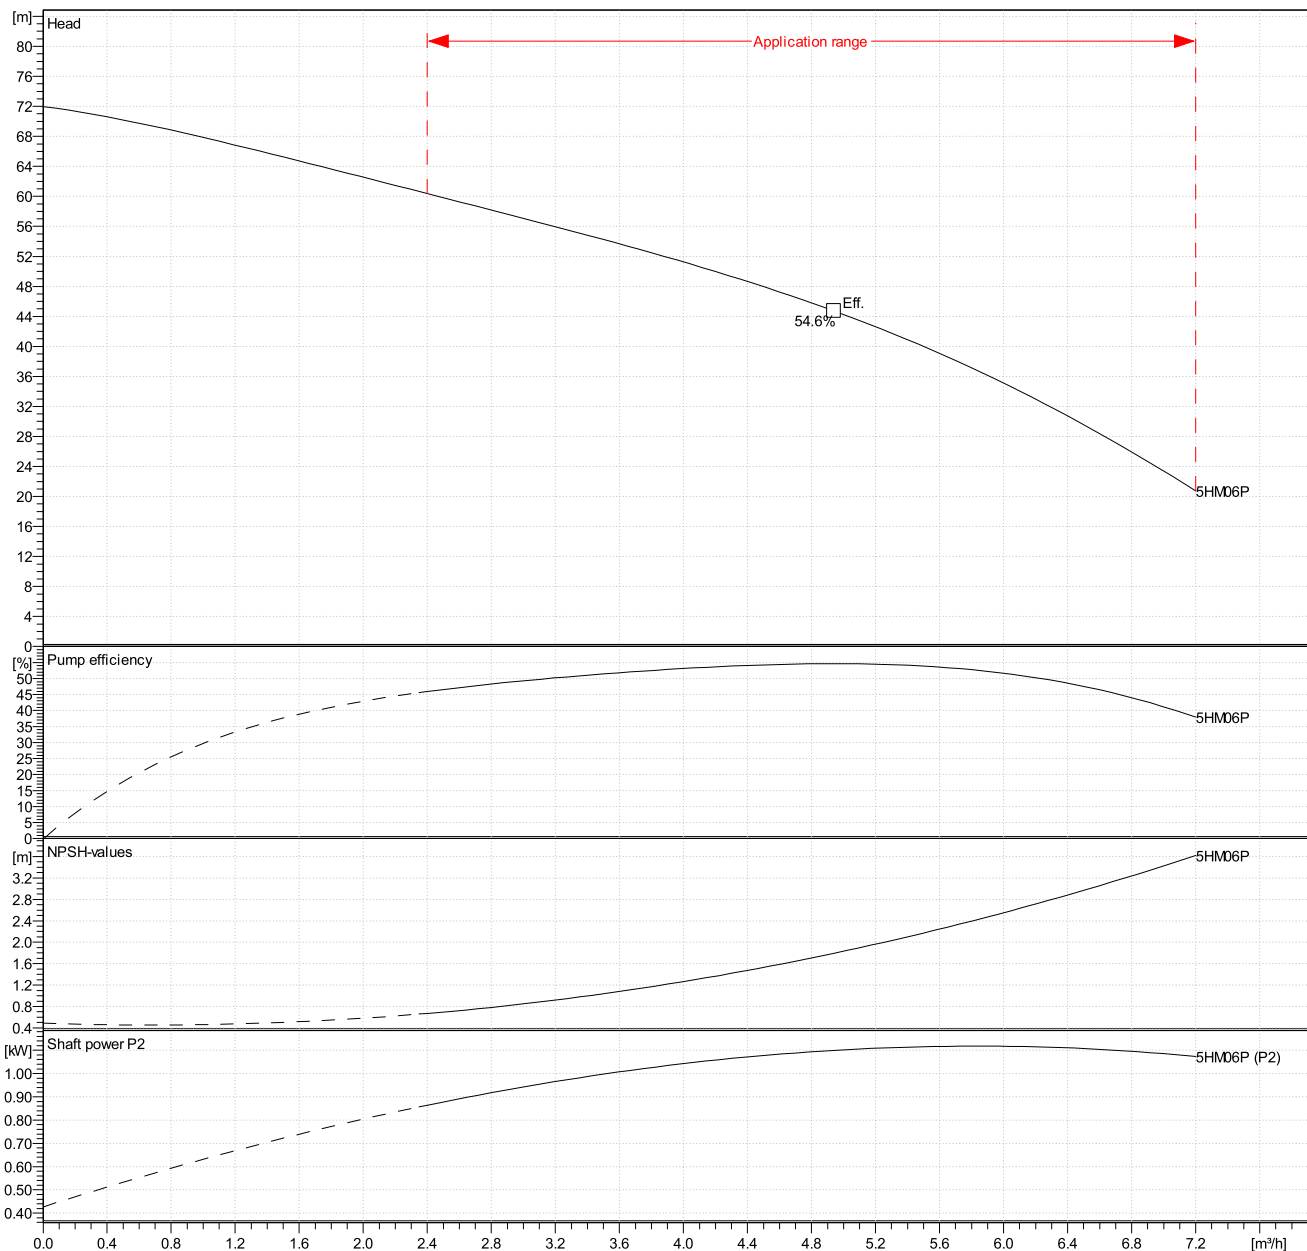

Customer	Date	1/6/2021
Contact	Project	
Phone number	Project no.	
Email		

5HM06P11M5HVBE
104600790

Drawing

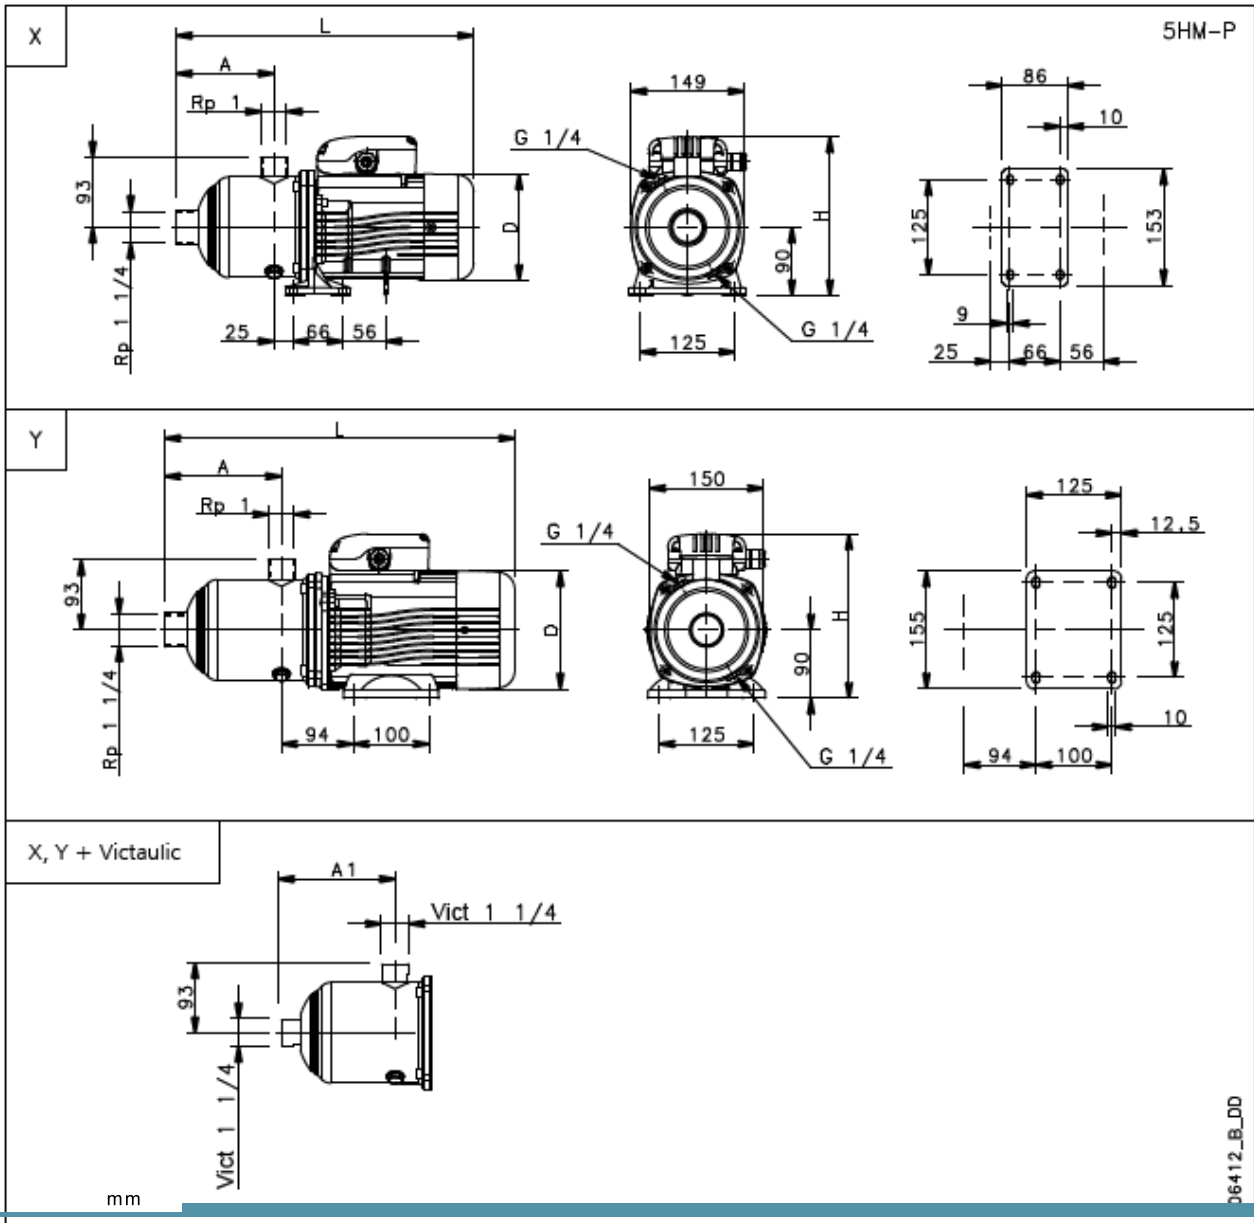

Di mm

06412_B_DD

A	149					Weight	
A1	147.3					14	kg
D	155						
Drawing	Y						
H	227						
L	457						
PN	10						