





by DOSATRON®

Ù

en

AN INNOVATION IN FERTIGATION

Hassle-Free Ultra-high Performance

OPTIMUM EFFECTIVENESS OF ADDITIVES A DOS

- COMPATIBLE WITH ALL FERTILISERS
- OPTIMISED WATER AND ADDITIVE CONSUMPTION

THE MOTOR

SIMPLIFIED HYDRAULIC MOTOR

NO METAL PARTS IN THE MOTOR

A REDUCED NUMBER OF PARTS

ECO DESIGNED



PUMP UP the growth!

> The Life Cycle Assessment estimates the lifespan of the D6 at 8 years' • Inventory of the physical flows of materials and energy associated with human activities throughout the life cycle of products

• Transparency, reliability, continuous improvement, better environmental performance

Our new fertiliser dosing pump, ideal for greenhouse and horticultural irrigation.



ATRON








	D6GL2BPVF
Min/max operating flow range	100 l/h min - 6m³/h max [0.44 US Pint/min (min.) - 26 US gpm (max.)]
Maximum operating temperature	40°C • [104°F]
Min/max operating water pressure	0,3 - 8 bars • [4.3 - 116 psi]
Min/max dosing percentage	0,2% - 2% • 1:500 - 1:50
Suction hose	Ø12x16mm • L 1,75m
Connection	1"1⁄4 Male BSP • Ø33x42mm
Hydrau <mark>lic mot</mark> or capacity (two piston clicks)	~ 1 liter • ~ 0.3 US Gallon
Other special features	Inlet injection, internal motor sleeve Manual bypass as standard
Seals	T
Optional	Hydraulic bypass (ref. PJDI175)

Fertinger by DOSATRON®

DOSATRON Technology

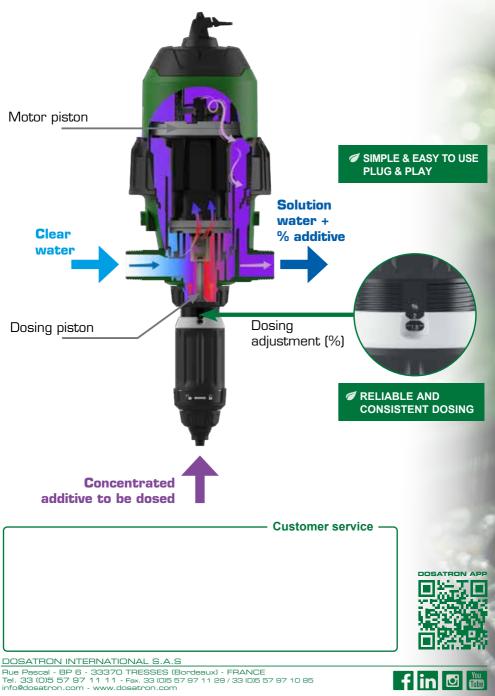

This document does not constitute a contractual obligation and is for information purposes only. DOSATRON INTERNATIONAL reserves the right to modify its devices at any time. Photo credit: ©Adobe Stock - Rathmakers. Some images have been generated by AI.